

PERFORMANCE
RELIABILITY
AND
VALUE

VGA 1x8 Splitter with Audio

Distribute high-resolution VGA signals with stereo audio



The KanexPro VGA splitter is a one input distribution amplifier that splits into eight separate outputs providing full HD 1080p/60Hz with stereo audio through 3.5mm jack. The 15-pin HD connectors are convenient and cost-effective for all input/output connections supporting full bandwidth compatible from VGA to WUXGA graphics card resolutions, HDTV's to projectors. In addition, each output performs an individual buffering to maintain signal integrity and reject noise interference.

Features

- Distribute VGA source to any VGA display with audio
- Full HD 1080p(1920x1080@60Hz)
- Compatible with VGA-WUXGA resolutions
- Stereo audio through 3.5mm jack
- EDID Compliant
- 5VDC external power supply included

Specifications


Interface: Input Transmitter
Male VGA (15 pin) x1 / 3.5mm Stereo x1

Output Receiver
Female VGA (15 pin) x8 / 3.5mm Stereo x 8

Video Amplifier Bandwidth: 500 MHz
Vertical Frequency Range: 30-170Hz
Maximum Resolution: 1920x1200 /1080p at 60Hz
Power Supply: HDMI Splitter Amplifier: 5V DC@2A, 5W

Operating Temperature: 0°C to +70°C
Operating Humidity: 10% to 85 % RH (no condensation)
Storage Temperature: -10°C to +80°C
Storage Humidity: 5% to 90 % RH (no condensation)
Regulatory Approvals Converter: FCC, CE, UL
Regulatory Approvals Power Supply: FCC, CE, UL
Dimensions: 10.5"x4.5"x1.8" (267x115x45mm)
Total Weight: 1.8 lb (810g)
Warranty: 1 Year parts and labor

Connection Diagram

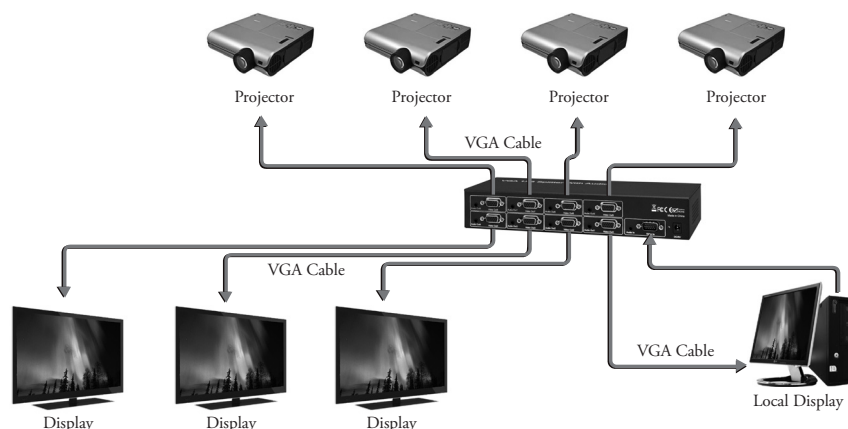

About KanexPro

KanexPro carries a broad selection of A/V connectivity products by leveraging the core strength in professional systems enabling you to broadcast, convert, extend, split, or multiply HD signal transmissions; simply and cost-effectively.

MPN: VGAIX8SP